A general method for constructing unitary operations for protocols with collective detection and new QKD protocols against collective noise

Wei Huang, Qiao-Yan Wen, Bin Liu, Fei Gao

arXiv:1210.1332v2 [quant-ph] 7 Oct 2012

***Abstract*—Collective detection is an efficient eavesdropping detection strategy in which the detection is taken only once after the whole process of particle transmission. Such detection strategy not only improves the efficiencies of the protocols but also reduces the cost of realization as the users (except for center) only need to perform unitary operations in the whole communication. The unitary operations, which cannot be discriminated precisely, are of vital role in the multiparty quantum cryptographic protocols with collective detection (MQCPs-CD). However, constructing such operations is still a difficult point that exists in designing this kind of protocols. In this paper, we present a method for constructing the required operations for MQCPs-CD with different kinds of quantum states. It is a general method which is helpful for designing secure MQCPs-CD over different kinds of quantum channels. Utilizing this method, we first present two robust three-party quantum key distribution (QKD) protocols with collective detection over collective-dephasing noise channel and collective-rotation noise channel respectively. Then we also propose a robust three-party QKD protocol with collective detection which can resist all kinds of unitary collective noise. Compared with the precious MQCPs-CD, our protocols are the first ones which can not only resist channel noise, but also utilize collective detection strategy. At last, we prove the security of all the proposed protocols based on the theorems of quantum operation discrimination.**

***Index Terms*—Quantum cryptography, quantum key distribution, collective detection, quantum operation discrimination, collective noise.**

I. INTRODUCTION

Over the last two decades, the principles of quantum mechanics have been applied in the field of information, which has promoted many interesting and important developments in quantum cryptography and quantum computation. Since the pioneering work of Bennett and Brassard [1], quantum cryptography has attracted a great deal of attention. So far, it has been one of the most promising applications of quantum information processing. There are several remarkable branches of quantum cryptography, such as quantum key distribution (QKD) [1]-[10], quantum secret sharing (QSS) [11]-[15], quantum secure direct communication (QSDC) [16]-[22], quantum identity authentication (QIA) [23]-[25] and so on. As one of the most important part of quantum cryptographic protocols, multiparty quantum cryptographic protocols (MQCPs), including at least three participants, such as three-party QKD protocols and n-party QSS protocols, are more complicated than the two-party ones. Therefore, more attention is needed in the research of MQCPs.

In most of MQCPs, detection should be taken in every step of the particles' transmission. While this detection strategy, which is called the step-by-step detection, always makes the protocols complicated and inefficient. On the other hand, the action of detection also requires the participants in such protocols to be equipped with quantum devices, e.g., the qubit measuring machine or the quantum memory. However, based on the current technology, these quantum devices are still expensive because of the difficulties on their constructions. So it is unrealistic that every participant is equipped with these quantum devices. Therefore, the protocols would be more efficient and easier to realize if the detection is taken after the whole process of the particle transmission, i.e. the collective detection. Collective detection is an efficient detection strategy in which detection need taking only once after the whole process of particle transmission. Such detection strategy not only improves the efficiencies of the protocols but also reduces the expense of realization. To date, much attention have been focused on this efficient detection strategy and a lot of protocols haven been proposed [27]-[33].

QKD enables two parties to produce a random secret key known only to them, which can be used to encrypt and decrypt messages afterwards. In order to improve efficiency and practicality, some three-party (a center and two users) QKD protocols [26]-[29] were presented with collective detection strategy. In 1995, Phoenix et al. proposed a three-party QKD protocol in which the two users only equip with the unitary operators for the key distribution [26]. However, the qubit efficiency of this protocol is only 13%. In 2009, Shih et al. put forward two three-party QKD protocols with collective detection in noiseless channel with single photons [27], which have much higher qubit efficiency than the one in Ref. [26]. One of the QKD protocols in Ref. [27] must be executed with an honest center and in the other QKD protocol, the center does not have to be trusted. However, there is a flaw in their protocols. In 2011, Gao et al. pointed out that the two protocols are both susceptible to the dense-coding attack [28], by which

---

This work is supported by NSFC (Grant Nos. 61170270, 61100203, 60903152, 61003286, 61121061), NCET (Grant No. NCET-10-0260), SRFDP (Grant No. 20090005110010), Beijing Natural Science Foundation (Grant Nos. 4112040, 4122054), the Fundamental Research Funds for the Central Universities (Grant Nos. BUPT2011YB01, BUPT2011RC0505, 2011PTB-00-29, 2011RCZJ15, 2012RC0612), BUPT Excellent Ph.D. Students Foundation (Grant No. CX201217).

The authors are with State Key Laboratory of Networking and Switching Technology, Beijing University of Posts and Telecommunications, Beijing 100876, China. (e-mail: huangwei096505@yahoo.cn; wqy@bupt.edu.cn; lbhitmanbl@gmail.com; gaofei_bupt@hotmail.com)

an outside attacker can eavesdrop all the session key without arousing any suspicion. After that, Liu et al. improved the two three-party QKD protocols to be able to resist Gao et al.'s attack and pointed out that the unitary operations used to encode the information should not be discriminated precisely in this kind of protocols[29]. Hence it is of great importance to find appropriate unitary operations in the MQCPs-CD.

However in practice, the qubits transmitted in quantum channel often interact with the environment uncontrollably, which will introduce noises into the communication and influences both the correctness and efficiency of communication. The noise, such as vibration, thermal fluctuation, and the imperfection of the fiber, will not only decrease the fidelity of the transmitted qubits, but also give the eavesdropper a chance to disguise her disturbance to the communication. To reduce or avoid the decoherence of quantum qubits caused by the channel noise, some good strategies, such as entanglement purification [35], single-photon error rejection [36] and decoherence-free subspace (DFS) [36]-[44], have been proposed. For the protocols utilizing the strategy of single-photon error rejection or the ideal of DFS, there is an important precondition named the collective noise assumption [34], [40]. That is, the qubits travel inside a time window that is shorter than the fluctuation of the channel noise. Supposing that several photons transmit through the noisy channel simultaneously or they are spatially close to each other, the transformations caused by the noise on each of the qubits is identical.

Till now, in order to resist collective noise, many protocols have been presented with the ideal of DFS [36]-[44]. Nevertheless, although collective detection strategy has the advantages of higher efficiency and lower cost of realization, these is still no protocol which can not only stand against channel noise but also utilize such detection strategy. It is just because of the enormous difficulty in constructing the required indistinguishable operations over collective-noise channel that there is still no such kind of protocol.

In this paper, a method for constructing the required operations, which cannot be discriminated precisely, is presented. This is a general method which can be used to design MQCPs-CD with different kinds of quantum states, such as single-photons, EPR pairs, GHZ states, etc. Based on this method, we first present two robust three-party quantum key distribution (QKD) protocols with collective detection over different collective-noise channels using two-particle states. One is against collective-dephasing noise, the other is against collective-rotation noise. Then we propose a three-party QKD protocol with collective detection which can resist all kinds of unitary collective noise using four-particle states. In these three protocols, the center should be honest and the two users only need to perform unitary operations on the states. After that, we also propose another three corresponding schemes in which the center need not to be trusted and the two users should have the abilities of performing unitary operations and storing qubits. Compared with the precious MQCPs, our protocols are the first ones which can not only stand against channel noise but also utilize such detection strategy.

The rest of this paper is organized as follows. The next section first presents a interesting method for constructing the required unitary operations which cannot be discriminated precisely over different kinds of channels. In section 3, our robust three-party QKD protocols (both the ones with an honest center and the ones with a dishonest center) with collective detection over different collective-noise channels are proposed in detail. In section 4, the security of the our proposed protocols is proved by using the theorems of quantum operation discrimination. Finally, a short conclusion is given in Section 5.

II. THE METHOD FOR CONSTRUCTING THE UNITARY OPERATIONS REQUIRED IN COLLECTIVE DETECTION STRATEGY

Till now, many MQCPs [27]-[28], [48]-[50] have been attacked since the unitary operation used in these protocols can be discriminated precisely if an eavesdropper utilizes some special attack strategies, such as dense-coding attack, fake-signal attack, etc. It is just because there is still no efficient method for constructing the required operations that some protocols may utilize improper ones to design MQCPs. In this section, we will present a general method for constructing the required operations which cannot be discriminated precisely in detail. Then we will prove the correctness of this method by using the conclusions on quantum operation discrimination. This is a useful method since it can be generally used to design MQCPs-CD over different kinds of quantum channels.

A. *Description of our method*

Let us first introduce the basic principle of the MQCPs-CD [27]-[33]. In this kind of schemes, two conjugate measuring bases (MBs) are first required, which are denoted as $\{|a\rangle, |b\rangle\}$ and $\{|c\rangle, |d\rangle\}$. Here, $|\langle a|b\rangle|^2$=$|\langle c|d\rangle|^2$= 0, $|\langle a|c\rangle$=$\langle a|d\rangle|^2$=$|\langle b|c\rangle|^2$=$|\langle b|d\rangle|^2$=$1/2$. Besides, there should also be a center who is responsible for generating and measuring qubits. The center generates a sequence of states in the two bases and sends them to the first user. Then the first user performs his unitary operations on the states, after which he sends the sequence to the second user. The second user does that which is the same as what the first user does. Afterwards he sends the sequence to the next user. When the last user finish his operations, he sends the sequence back to the center. After the receiving the sequence, the center do the eavesdropping check with the help of the classical information announced by the users.

For each of the users in such protocols, after the receiving of the sequence, he first encodes his secret by performing the operation I (identity operator) or U (encoding operations) on the states in the two bases. The effect of the unitary operations U is that it flips the state in the same MB, i.e. $U|a\rangle = \alpha|b\rangle$, $U|b\rangle = \beta|a\rangle$, $U|c\rangle = \gamma|d\rangle$, $U|d\rangle = \delta|c\rangle$. Here $\alpha, \beta, \gamma, \delta$ are global phase factors which can be ignored. After that, he disturbs the encoded states by randomly performing the operation I (identity operation) or C (control operations) on the encoded states. The effect of the unitary operations C is that it flips a state from one base to the other base. If an eavesdropper wants to get some information of the user' secret without leaving a trace in the eavesdropping check,



Fig. 1. Take two-qubit unitary operations for example. This figure shows the definition of the function $r(U) = r$, where λ_1, λ_2, λ_3 and λ_4 are eigenvalues of the matrix U and r is the distance between the origin of the complex plane o and the polygon $\lambda_1\lambda_2\lambda_3\lambda_4$ ($r = 0$ when o is in/on the polygon).

she should have the ability of discriminating the four unitary operations I, U, C and UC precisely. Therefore, the key point of designing a secure MQCP-CD is to find the appropriate unitary operations U and C.

Now we present the method for constructing the required unitary operations. Suppose V is a d-dimensional Hilbert space. Using the Gram-Schmidt procedure, it is easy to construct an orthonormal basis $\{|0\rangle, ..., |d-1\rangle\}$ for V. It can be easily proved that $\{|0\rangle, |1\rangle\}$ and $\{|+\rangle, |-\rangle\}$ are two conjugate measuring bases. Here,

$$|+\rangle = \frac{1}{\sqrt{2}}(|0\rangle - i|1\rangle), \quad |-\rangle = \frac{1}{\sqrt{2}}(|1\rangle - i|0\rangle) \tag{1}$$

Then the required encoding operation could be in the form of

$$U = |0\rangle\langle 1| + |1\rangle\langle 0| + M \tag{2}$$

Here, the part M should meet the following two conditions: First, M should be a proper form in order to make U be an unitary operation, i.e. $U^\dagger U$=$UU^\dagger$=I; Second, M should be orthogonal to both $|0\rangle$ and $|1\rangle$. It can be easily proved that the operation U in Eq. (2) could flips each one of the states $\{|0\rangle, |1\rangle, |+\rangle, |-\rangle\}$ in the same MB when M is in a required form. There are many reasonable choices for the form of M, such as $M = |2\rangle\langle 2|+, ... + |d-1\rangle\langle d-1|$ and $M = |2\rangle\langle 3| + |3\rangle\langle 4|+, ..., +|d-1\rangle\langle 2|$. After we get a proper encoding operation U, we choose one of the square roots of unitary operation U as the control operation, which could flip each one of the states $\{|0\rangle, |1\rangle, |+\rangle, |-\rangle\}$ from one base to the other base, i.e. $C = \sqrt{U}$. The choice approach for operation C will be given in the following proof. Till now, an efficient method for constructing the required encoding operation and control operation has been presented.

B. Proof of the proposed method

Now we will demonstrate that the four unitary operations I, U, C and UC cannot be discriminated precisely if they are constructed by our method. Before demonstrating, we first introducing an important theorem on quantum operation discrimination.

Theorem 1 [29], [52] Under the condition that the device can be accessed only once, the minimum error probability to discriminate the two operations U_1 and U_2 is

$$P_E = \frac{1}{2}\left[1 - \sqrt{1 - 4p_1p_2\mathrm{r}(U_1^\dagger U_2)^2}\,\right] \tag{3}$$

Here, $\mathrm{r}(U_1^\dagger U_2)$ denotes the distance between the origin of the complex plane and the polygon (line segment if the operations are single qubit operations) whose vertices are the eigenvalues of the unitary operator $U_1^\dagger U_2$ (see Fig. 1), and $U^\dagger$ represents the adjoint matrix of U.

Corollary 2 Under the condition that the device can be accessed only once, two unitary operations U_1 and U_2 can be discriminate precisely if and only if $\mathrm{r}(U_1^\dagger U_2) = 0$.

As described in the presented method, C=$\sqrt{U}$ (U=C^2). It can be easily found that $\mathrm{r}(I^\dagger C)$=$\mathrm{r}(U^\dagger UC)$=$\mathrm{r}(C)$, $\mathrm{r}(U^\dagger C)$=$\mathrm{r}(U^{-1}C)$=$\mathrm{r}(C^{-1})$=$\mathrm{r}(C^\dagger)$. According to Theorem 1 and Corollary 2, under the condition that the device can be accessed only once, the two operations I and C (U and C, U and UC) constructed by our method cannot be discriminated precisely if and only if both $\mathrm{r}(C^\dagger)$ and $\mathrm{r}(C)$ are not equal to zero. Now we demonstrate that both $\mathrm{r}(C^\dagger)$ and $\mathrm{r}(C)$ are not equal to zero, i.e., $\mathrm{r}(C^\dagger)$>0 and $\mathrm{r}(C)$>0. Since U is an unitary operation, all the eigenvalues of U are the points on the unit circle in complex plane. That is, all the eigenvalues of U can be written in the form of $e^{i(\theta+2k\pi)}$, here $e^{i(\theta+2k\pi)}$=$e^{i\theta}$, θ∈$[0, 2\pi)$, k∈Z. Therefore, all the eigenvalues of the operation $\sqrt{U}$ should be in the form of $e^{i(\beta+k\pi)}$, here $e^{i(\beta+k\pi)}$=$e^{i(\frac{\theta}{2}+k\pi)}$, β∈$[0, \pi)$, k∈Z. It is obviously that U has more than one square roots. Take the Pauli operation σ_0 as an simple example. Since σ_0 can be written as either $e^{i\cdot 0}|0\rangle\langle 0| + e^{i\cdot 0}|1\rangle\langle 1|$ or $e^{i\cdot 0}|0\rangle\langle 0| + e^{i\cdot 2\pi}|1\rangle\langle 1|$, both $e^{i\cdot 0}|0\rangle\langle 0| + e^{i\cdot 0}|1\rangle\langle 1|$ and $e^{i\cdot 0}|0\rangle\langle 0| + e^{i\cdot \pi}|1\rangle\langle 1|$ are the square roots of σ_0, i.e., σ_0=σ_0^2, σ_0=σ_z^2.

In our method, we choose the special square root (of U) whose eigenvalues are all in the form of $e^{i\beta}$ (corresponding to the cases that k is even) as the control operation C. As β∈$[0, \pi)$, all the the eigenvalues of C is the points on the upper half of the unit circle (except for -1) in complex plane and therefore $\mathrm{r}(C)$>0. In addition, since all the the eigenvalues of C is the points on the upper half of the unit circle (except for -1), it is evident that all the the eigenvalues of $C^\dagger$ are the points on the bottom half of the unit circle (except for -1), which means $\mathrm{r}(C^\dagger)$>0. That is to say, the two operations I and C (U and C, U and UC) constructed by our method cannot be discriminated precisely.

Till now, we have proved that the four unitary operations I, U, C and UC cannot be discriminated precisely if they are constructed by our method. Utilizing this method, we can find the required bases and unitary operations for designing secure MQCPs-CD over different channels.

C. The role of the proposed method

If someone wants to design a MQCP-CD using a certain kind of quantum state in his favour, one of the most important thing he should do is to find the corresponding encoding operation (U) and controlling operation (C) which cannot be discriminated precisely. Obviously, the method we just proposed above can be used to construct such unitary operations according to the kind of the quantum state the designer wants to use. For example, if he wants to design a MQCP-CD with single photons, a natural choice for one the two bases could be $\{|0_s\rangle$ and $|1_s\rangle\}$, here $|0_s\rangle$ and $|1_s\rangle$ represent the horizontal and vertical polarizations of photons respectively. Utilizing our method presented above, the other base could be chosen as$\{|+_s\rangle, |-_s\rangle\}$, here $|+_s\rangle = \frac{1}{\sqrt{2}}(|0_s\rangle - i|1_s\rangle)$, $|-\rangle = \frac{1}{\sqrt{2}}(|1_s\rangle - i|0_s\rangle)$, and the corresponding encoding operation (U_s) and controlling operation (C_s) can be constructed as follows.

$$U_s = |0_s\rangle\langle_s 1| + |1_s\rangle\langle_s 0| = \begin{pmatrix} 0 & 1 \\ 1 & 0 \end{pmatrix}, \tag{4}$$

$$C_s = \sqrt{U_s} = \frac{1+i}{2}\begin{pmatrix} 1 & -i \\ -i & 1 \end{pmatrix} \tag{5}$$

It can be easily verified that $\{|0_s\rangle, |1_s\rangle\}$ and $\{|+_s\rangle, |-_s\rangle\}$ form two nonorthogonal unbiased bases. Also the effects of the two unitary operations on the four states can be described as follows.

$$\begin{aligned} U_s|0\rangle = |1\rangle, &\qquad U_s|1\rangle_L = |0\rangle_L; \\ U_s|+\rangle = |-\rangle, &\qquad U_s|-\rangle_L = |+\rangle_L; \qquad (6) \\ C_s|0\rangle = (\tfrac{1+i}{\sqrt{2}})|+\rangle_L, &\qquad C_s|1\rangle_L = (\tfrac{1+i}{\sqrt{2}})|-\rangle_L; \\ C_s|+\rangle = (\tfrac{1-i}{\sqrt{2}})|1\rangle_L, &\qquad C_s|-\rangle_L = (\tfrac{1-i}{\sqrt{2}})|0\rangle_L. \qquad (7) \end{aligned}$$

Utilizing the two bases and two operations (U_s and C_s) given above, one can design different kinds of secure MQCPs-CD with single photons. Obviously, there still are some other choices of the two operations if we choose other single particles to act as the two bases. To date, in order to improve the efficiencies and reduce the expense of realization, many MQCPs-CD [27]-[33] have been proposed with single photons. Unfortunately, all of the previous protocols which utilize collective detection were designed [27]-[33] in ideal condition, hence they can not resist the noise in the quantum channel. However, how to design protocols in non-ideal condition is one of the key research points in quantum cryptography at present. Hence in next section, we will focus on the three-party QKD protocols with collective detection over different collective-noise channels based on the presented method.

III. PROPOSED QUANTUM KEY DISTRIBUTION PROTOCOLS OVER COLLECTIVE-NOISE CHANNELS

Utilizing the presented method in the previous section, two robust three-party quantum key distribution (QKD) protocols with collective detection over different collective-noise channels are first proposed using two-particle states. One is against collective-dephasing noise, the other is against collective-rotation noise. Then we also present a three-party QKD protocol with collective detection which can resist all kinds of unitary collective noise using four-particle states. In these three protocols, the center, which is consider to be honest, is responsible for generating and measuring states. The user (Alice) can encode her session key into the states produced by the center, and the other user (Bob) can deduce the session key from the measuring results published by the center. In this case, the users (Alice and Bob) only need to hide their secrets in the transmitted states with proper unitary operations. What's more, considering the center may be malicious and try to eavesdrop the session key shared between the users in some situations, we also propose the corresponding schemes with a dishonest center. These protocols are the first ones which can not only stand against channel noise but also utilize collective detection strategy.

A. Robust Quantum Key Distribution Against Collective-Dephasing Noise

A collective-dephasing noise can be described as

$$U|0\rangle = |0\rangle, \qquad U|1\rangle = e^{i\phi}|1\rangle \tag{8}$$

where ϕ is the noise parameter and it fluctuates with time. $|0\rangle$ and $|1\rangle$ represent the horizontal and vertical polarizations of photons, respectively. In general, a logical qubit encoded into two physical qubits with antiparallel parity is immune to this kind of noise as these two logical qubits acquire the same phase factor $e^{i\phi}$ through the collective-dephasing noise channel.

$$|0\rangle_L \equiv |0\rangle|1\rangle, \qquad |1\rangle_L \equiv |1\rangle|0\rangle \tag{9}$$

To communicate securely, at least two nonorthogonal measuring bases (MBs) are required. One of the bases is in Eq. (7), the other is

$$|+\rangle_L = \frac{1}{\sqrt{2}}(|0\rangle_L - i|1\rangle_L); \quad |-\rangle_L = \frac{1}{\sqrt{2}}(|1\rangle_L - i|0\rangle_L) \tag{10}$$

It is straightforward to verify that $|\langle +|0\rangle_L|^2 = |\langle +|1\rangle_L|^2 = |\langle -|0\rangle_L|^2 = |\langle -|1\rangle_L|^2 = \frac{1}{2}$, which means $\{|0\rangle_L, |1\rangle_L\}$ and $\{|+\rangle_L, |-\rangle_L\}$ form two nonorthogonal unbiased bases. Using the method described above, we now construct the encoding operation (U_{dp}) and control operation (C_{dp}) for our robust three-party QKD protocol against collective-dephasing noise as follows.

$$\begin{aligned} U_{dp} &= |01\rangle\langle 10| + |10\rangle\langle 01| + |00\rangle\langle 11| + |11\rangle\langle 00| \\ &= \begin{pmatrix} 0 & 0 & 0 & 1 \\ 0 & 0 & 1 & 0 \\ 0 & 1 & 0 & 0 \\ 1 & 0 & 0 & 0 \end{pmatrix} \end{aligned} \tag{11}$$

$$C_{dp} = \sqrt{U_{dp}} = \frac{1+i}{2}\begin{pmatrix} 1 & 0 & 0 & -i \\ 0 & 1 & -i & 0 \\ 0 & -i & 1 & 0 \\ -i & 0 & 0 & 1 \end{pmatrix} \tag{12}$$

The effect of the operations U_{dp} and C_{dp} on the states in the two bases can be described as below.

$$\begin{aligned} U_{dp}|0\rangle_L = |1\rangle_L; &\qquad U_{dp}|1\rangle_L = |0\rangle_L \\ U_{dp}|+\rangle_L = |-\rangle_L; &\qquad U_{dp}|-\rangle_L = |+\rangle_L \qquad (13) \\ C_{dp}|0\rangle_L = (\tfrac{1+i}{\sqrt{2}})|+\rangle_L; &\qquad C_{dp}|+\rangle_L = (\tfrac{1-i}{\sqrt{2}})|1\rangle_L \\ C_{dp}|1\rangle_L = (\tfrac{1+i}{\sqrt{2}})|-\rangle_L; &\qquad C_{dp}|-\rangle_L = (\tfrac{1-i}{\sqrt{2}})|0\rangle_L \qquad (14) \end{aligned}$$

The principle of our robust three-party QKD protocol against

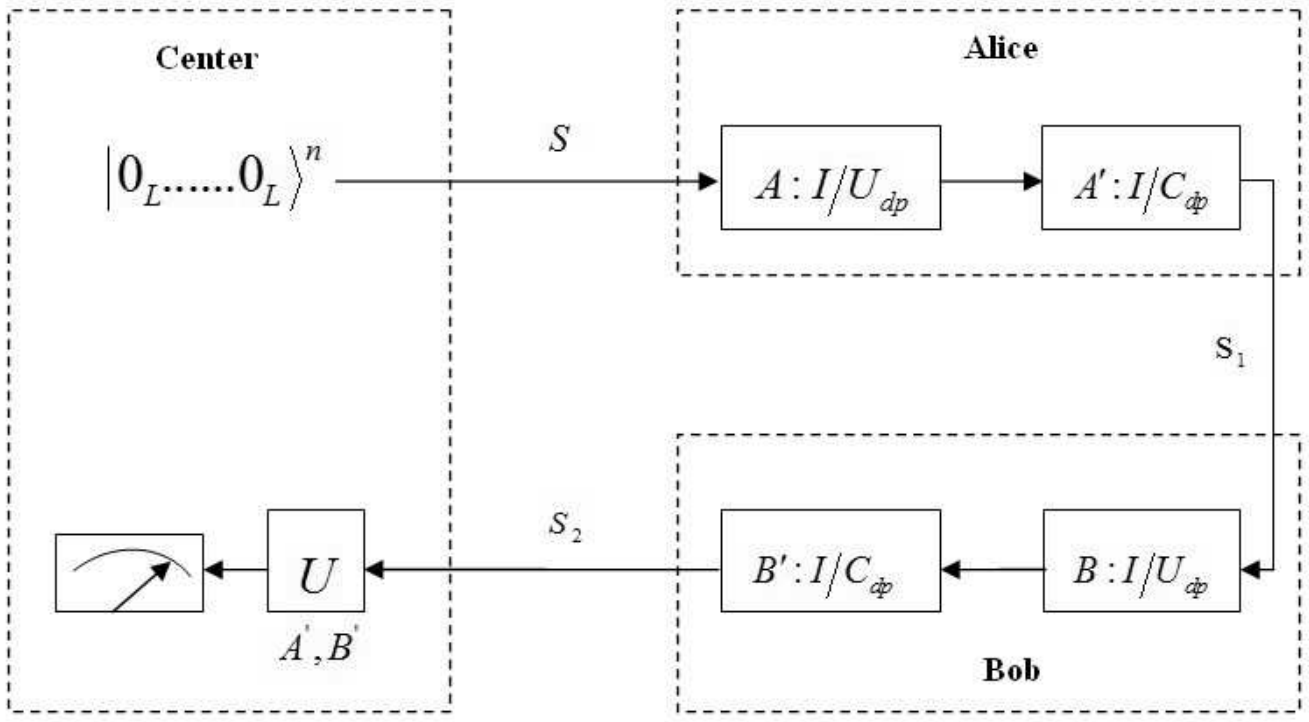

Fig. 2. The process of our robust quantum key distribution against collective-dephasing noise, where U represents one of the three unitary operations $\{I, C_{dp}^{-1}, U_{dp}\}$. The classical communications are omitted.

collective-dephasing noise can be described as follows (See Fig. 1).

(a) The center prepares a sequence of n logical states which are all in the state $|0\rangle_L$ (denoted as sequence S) and sends it to Alice.

(b) After receiving S, Alice first generates two random binary strings of length n, which are denoted as A and A', respectively. Then she encodes the states by performing U^{A_i} on the i-th state in S. After that, she performs operation $C^{A'_i}$ on the i-th state in the string (A_i and A'_i are respectively the i-th bit of sequence A and A'). Here, U^0=C^0=I (identity operator on two-qubit states), U^1=U_{dp} and C^1=C_{dp}. Then she sends the new sequence (denoted as S_1) to Bob.

(c) After Bob receives the sequence S_1, he first generates two random binary strings of length n, which are denoted as B and B', respectively. then he encodes the states by performing U_i^B on the i-th state in S_1. After that, he performs operation $C^{B'_i}$ the i-th state in the sequence. Here, U^0=C^0=I, U^1=U_{dp} and C^1=C_{dp}. At last, he sends the the new sequence (denoted as S_2) back to the center.

(d) After receiving S_2, the center asks Alice and Bob to publish the strings A' and B' in order to know their control operations on each state of the traveling sequence. For each state in S_2, if the total number of the operation C^1 they did is 0 (1 or 2), the center performs I (C_{dp}^{-1} or U_{dp}) on it. Here, C_{dp}^{-1} represents the inverse of C_{dp}. Then the center makes measurement on each the state in basis $\{|00\rangle, |01\rangle, |10\rangle, |11\rangle\}$ and gets the secret bit C_i=0 (C_i=1) if the measurement outcome is $|0\rangle_L$ ($|1\rangle_L$). It is obviously that C_i=$A_i \oplus B_i$.

(e) After obtaining the string C (C=$A \oplus B$), the center randomly chooses m bits out of the n secret bits for eavesdropping check. He asks Alice and Bob to announce their encoding operations on each of the m states, and then he checks whether the outcomes are in accordance. If more than an acceptable error rate is found, they abort the results, otherwise, Bob can trust the transmission and determine a raw key ($n-m$ bits) with the values of the rest $n-m$ bits in C announced by the center. At last, Alice and Bob can utilize error correction and privacy amplification [46], [47] to establish the final session key.

In this scheme, with the help of the Center, the users can establish a shared secret key over collective-dephasing channel only with unitary operations. And almost all the states can be employed to establish the secret key except for the ones used for eavesdropping check. Besides, the users should set up the filter and the beam splitter to prevent the trojan horse attack [55], [56].

B. Robust Quantum Key Distribution Against Collective-Rotation Noise

A collective-rotation noise can be described as

$$U|0\rangle = \cos\theta|0\rangle + \sin\theta|1\rangle; U|1\rangle = -\sin\theta|0\rangle + \cos\theta|1\rangle \quad (15)$$

The parameter θ depends on the noise and fluctuates with time. The two Bell states $|\Phi^+\rangle = \frac{1}{\sqrt{2}}(|00\rangle + |11\rangle)$ and $|\Psi^-\rangle = \frac{1}{\sqrt{2}}(|01\rangle - |10\rangle)$ are invariant under this collective-rotation noise. Hence, logical qubits under this noise can be chosen as

$$|0_r\rangle_L = |\Phi^+\rangle; \quad |1_r\rangle_L = |\Psi^-\rangle \quad (16)$$

To communicate securely, at least two nonorthogonal measuring bases (MBs) are required. One of the bases is in Eq. (14), the other is

$$\begin{aligned} |+_r\rangle_L &= \frac{1}{\sqrt{2}}(|0_r\rangle_L - i|1_r\rangle_L) \\ |-_r\rangle_L &= \frac{1}{\sqrt{2}}(|1_r\rangle_L - i|0_r\rangle_L) \end{aligned} \quad (17)$$

It can be easily proved that $|\langle_r +|0_r\rangle_L|^2 = |\langle_r +|1_r\rangle_L|^2 = |\langle_r -|0_r\rangle_L|^2 = |\langle_r -|1_r\rangle_L|^2 = \frac{1}{2}$, which means $\{|0_r\rangle_L, |1_r\rangle_L\}$ and $\{|+_r\rangle_L, |-_r\rangle_L\}$ form two nonorthogonal unbiased bases. Using the method described above, we now construct the encoding operation (U_r) and control operation (C_r) for our robust three-party QKD protocol against collective-rotation noise as follows.

$$\begin{aligned} U_r &= |\phi^+\rangle\langle\psi^-| + |\psi^-\rangle\langle\phi^+| + |\psi^+\rangle\langle\phi^-| + |\phi^-\rangle\langle\psi^+| \\ &= \begin{pmatrix} 0 & 1 & 0 & 0 \\ 1 & 0 & 0 & 0 \\ 0 & 0 & 0 & -1 \\ 0 & 0 & -1 & 0 \end{pmatrix} \end{aligned} \quad (18)$$

$$C_r = \sqrt{U_r} = \frac{1+i}{2}\begin{pmatrix} 1 & -i & 0 & 0 \\ -i & 1 & 0 & 0 \\ 0 & 0 & 1 & i \\ 0 & 0 & i & 1 \end{pmatrix} \quad (19)$$

The effect of the operations U_r and C_r on the states in the two bases can be described as below.

$$\begin{aligned} U_r|0_r\rangle_L &= |1_r\rangle_L; \qquad U_r|1_r\rangle_L = |0_r\rangle_L \\ U_r|+_r\rangle_L &= |-_r\rangle_L; \qquad U_r|-_r\rangle_L = |+_r\rangle_L \end{aligned} \quad (20)$$

$$\begin{aligned} C_r|0_r\rangle_L &= (\tfrac{1+i}{\sqrt{2}})|+_r\rangle_L; \qquad C_r|+_r\rangle_L = (\tfrac{1-i}{\sqrt{2}})|1_r\rangle_L \\ C_r|1_r\rangle_L &= (\tfrac{1+i}{\sqrt{2}})|-_r\rangle_L; \qquad C_r|-_r\rangle_L = (\tfrac{1-i}{\sqrt{2}})|0_r\rangle_L \end{aligned} \quad (21)$$

As in this case of collective-rotation noise, with the help of

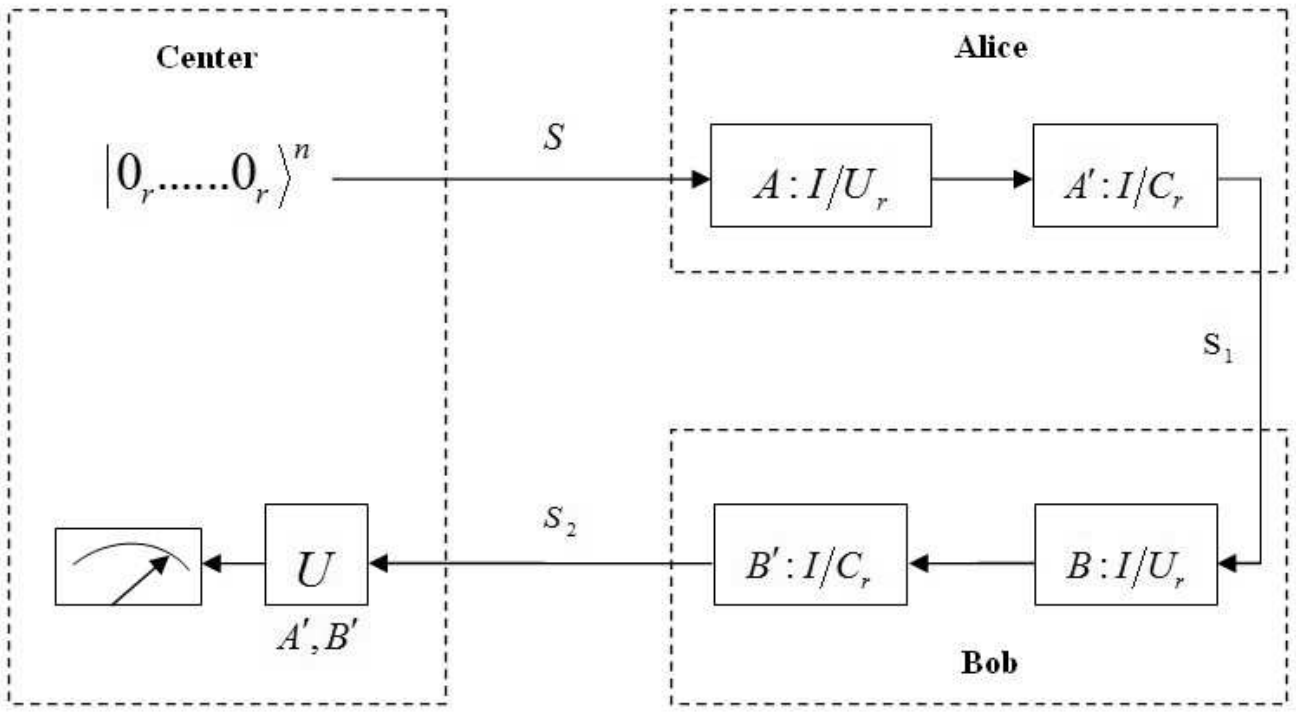

Fig. 3. The process of our robust quantum key distribution against collective-rotation noise, where U represents one of the three unitary operations $\{I, C_r^{-1}, U_r\}$. The classical communications are omitted.

the center, Alice and Bob can also establish a shared secret key over all kinds of collective-noise channel with the same steps described in the protocol over collective-dephasing channel given above. Certainly, there are some differences between these two cases. One difference is that the four states used for encoding the secret key are $\{|0_r\rangle_L, |1_r\rangle_L, |+_r\rangle_L, |-_r\rangle_L\}$ this time, not $\{|0\rangle_L, |1\rangle_L, |+\rangle_L, |-\rangle_L\}$ in the protocol against collective-dephasing noise. Another difference is that unitary operations (encoding operation and control operation) are U_r and C_r, not $U_{dp}$and C_{dp} in the protocol against collective-dephasing noise. Besides, the users should also set up the filter and the beam splitter to prevent the trojan horse attack [55], [56].

C. Robust Quantum Key Distribution Against All Kinds of Collective Noise

Utilizing the presented method, we have proposed two robust three-party QKD protocols with collective detection , which can resist collective-dephasing noise and collective-rotation noise respectively. In these protocols, only two-particle states and two-particle measurement are required. Now in this part, we will propose a fault-tolerant three-party QKD protocol with four-particle states, which can resist all kinds of unitary collective noise.

The singlet $|\psi^-\rangle$ is one of the decoherence-free (DF) states [34], [45] which are invariant under any n-lateral unitary transformation (i.e., $U^{\otimes n}|\theta\rangle = |\theta\rangle$, where $U^{\otimes n} = U \otimes ... \otimes U$ denotes the tensor product of n unitary transformations U). The amount of quantum information that a given DF subspace is able to protect depends on the number N of qubits. For N even, the DF subspace spanned by states which are eigenstates of the whole Hamiltonian of the qubit-bath system and also eigenstates of the interaction Hamiltonian with eigenvalue zero has dimension [34], [41]

$$d(N) = \frac{N!}{(N/2)!(N/2+1)!} \tag{22}$$

For N=2 qubits, there is only one DF state, the singlet state ($|\psi^-\rangle$). For N=4 qubits, the dimension of the DF subspace is 2. Therefore, 4 qubits are sufficient to fully protect one arbitrary logical qubit against collective noise. A natural choice of the orthogonal basis in the 4-qubit DF subspace is:

$$\begin{aligned} |\bar{0}\rangle_L &= |\psi^-\rangle_{12}|\psi^-\rangle_{34} \\ &= \frac{1}{2}(|0101\rangle + |1010\rangle - |0110\rangle - |1001\rangle)_{1234} \\ |\bar{1}\rangle_L &= \frac{1}{2\sqrt{3}}(2|0011\rangle + 2|1100\rangle - |0101\rangle - |1010\rangle \\ &\quad -|0110\rangle - |1001\rangle)_{1234} \end{aligned} \tag{23}$$

To communicate securely, at least two nonorthogonal measuring bases (MBs) are required. One of the bases is in Eq. (20), the other is

$$\begin{aligned} |\bar{+}\rangle_L &= \frac{1}{\sqrt{2}}(|\bar{0}\rangle_L - i|\bar{1}\rangle_L) \\ |\bar{-}\rangle_L &= \frac{1}{\sqrt{2}}(|\bar{1}\rangle_L - i|\bar{0}\rangle_L) \end{aligned} \tag{24}$$

It can be easily verified that $|\langle\bar{+}|\bar{0}\rangle_L|^2$=$|\langle\bar{+}|\bar{1}\rangle_L|^2$=$|\langle\bar{-}|\bar{0}\rangle_L|^2$=$|\langle\bar{-}|\bar{1}\rangle_L|^2$=$\frac{1}{2}$, which means $\{|\bar{0}\rangle_L, |\bar{1}\rangle_L\}$ and $\{|\bar{+}\rangle_L, |\bar{-}\rangle_L\}$ form two nonorthogonal unbiased bases. Suppose W is the 4-qubit Hilbert space whose dimension is 16, then we can find an orthonormal basis $|\bar{0}\rangle_L, |\bar{1}\rangle_L, ..., |\bar{15}\rangle$ for W using the Gram-Schmidt procedure. For simplicity, we do not give the concrete form of the states $|\bar{2}\rangle_L, |\bar{3}\rangle_L, ..., |\bar{15}\rangle$ as the well known Gram-Schmidt procedure is not complicated. After getting all the states of the orthonormal basis, we can construct the encoding operation ($\bar{U}$) and control operation ($\bar{C}$) for our robust QKD protocol against all kinds of collective noise based the presented method. The form of the encoding operations $\bar{U}$ and $\bar{C}$ are as follows.

$$\bar{U} = |\bar{0}\rangle\langle\bar{1}| + |\bar{1}\rangle\langle\bar{0}| + O; \quad \bar{C} = \sqrt{\bar{U}} \tag{25}$$

Here, we have many reasonable choices for the from of O, such as $O = |\bar{2}\rangle\langle\bar{2}|+, ... + |\bar{15}\rangle\langle\bar{15}|$ and $O = |\bar{2}\rangle\langle\bar{3}| + |\bar{3}\rangle\langle\bar{4}|+, ..., +|\bar{15}\rangle\langle\bar{2}|$. For example, when $O = |\bar{2}\rangle\langle\bar{3}| + |\bar{3}\rangle\langle\bar{4}|+, ..., +|\bar{15}\rangle\langle\bar{2}|$, the effect of the operations $\bar{U}$ and $\bar{C}$ on the states in the two bases can be described as below.

$$\begin{aligned} \bar{U}|\bar{0}\rangle_L = |\bar{1}\rangle_L; &\qquad \bar{U}|\bar{1}\rangle_L = |\bar{0}\rangle_L \\ \bar{U}|\bar{+}\rangle_L = |\bar{-}\rangle_L; &\qquad \bar{U}|\bar{-}\rangle_L = |\bar{+}\rangle_L \end{aligned} \tag{26}$$

$$\begin{aligned} \bar{C}|\bar{0}\rangle_L = (\tfrac{1+i}{\sqrt{2}})|\bar{+}\rangle_L; &\qquad \bar{C}|\bar{+}\rangle_L = (\tfrac{1-i}{\sqrt{2}})|\bar{1}\rangle_L \\ \bar{C}|\bar{1}\rangle_L = (\tfrac{1+i}{\sqrt{2}})|\bar{-}\rangle_L; &\qquad \bar{C}|\bar{-}\rangle_L = (\tfrac{1-i}{\sqrt{2}})|\bar{0}\rangle_L \end{aligned} \tag{27}$$

As in this case with all kinds of collective noise, with the help of the center, Alice and Bob can also establish a shared secret key over all kinds of collective-noise channel with the same steps described in the protocol over collective-dephasing (collective-rotation) channel given above. Certainly, there are some differences between these two cases. One difference is that the four states used for encoding the secret key are $\{|\bar{0}\rangle_L, |\bar{1}\rangle_L, |\bar{+}\rangle_L, |\bar{-}\rangle_L\}$ this time, not $\{|0\rangle_L, |1\rangle_L, |+\rangle_L, |-\rangle_L\}$ ($\{|0_r\rangle_L, |1_r\rangle_L, |+_r\rangle_L, |-_r\rangle_L\}$) in the protocol against collective-dephasing noise (collective-rotation noise). Another difference is that unitary operations (encoding operation and control operation) are $\bar{U}$ and $\bar{C}$ this time, not U_{dp} and C_{dp} (U_r and C_r) in the protocol against collective-dephasing noise (collective-rotation noise). Besides, the users should also set up the filter and the beam splitter to prevent the trojan horse attack [55], [56].

D. Robust Protocols With A Dishonest Center

Till now, we have proposed three robust three-party QKD protocols with collective detection over different collective-noise channels based on the presented method in Sec. 2. In all these schemes, with the help of an honest center, the users (Alice and Bob) can establish a shared secret key only with unitary operations. However, in some situations, the center may be malicious and try to eavesdrop the session key shared between the users. The three-party QKD protocols proposed above suffers the eavesdropping attack from the malicious center because the center can intercept the sequence S_1 and generate new sequence for Bob in step (b). Then the center can deduce the session secret key in step (e) and finish the execution of the protocol without being noticed by the users. To avoid this situation, we further propose the corresponding protocols with a dishonest center. In these three-party protocols which can prevent a dishonest center from eavesdropping the session key, the center simply generates and measures states and only the legitimate users can obtain the session key. Now let us describe the steps included in the three-party QKD protocol with a dishonest center which can resist collective-rotation noise (See Fig. 3).

S1: The center prepares a sequence of n logical states which are all in the state $|0_r\rangle_L$ (denoted as sequence S) and sends it to Alice.

S2: After receiving S, Alice first generates two random binary strings of length n, which are denoted as A and A', respectively. Then she encodes the states by performing U^{A_i} on the i-th state in S. After that, she performs operation $C^{A'_i}$ on the i-th state in the string (A_i and A'_i are respectively the $i\text{-}th$ bit of strings A and A'). Here, U^0=C^0=I, U^1=U_r and C^1=C_r. Then she sends the new sequence (denoted as S_1) to Bob.

S3: After receiving S_1, Bob preserves the states and tells Alice “OK”.

S4: After receiving Bobs notification, Alice announces the string A' to Bob.

S5: According to the string A', Bob performs I (C_r^{-1}) on the i-th state in S_1 if the corresponding bit in A' is 0 (1). Moreover, Bob shuffles the sequence of states with a permutation function G and sends the processed string S_2 back to the center through the quantum channel.

S6: After the receiving of S_2, the center makes an measurement on each the state in basis $\{|0_r\rangle_L, |1_r\rangle_L\}$, gains the measuring result C'=shuffled_A and sends C' back to Bob.

S7: Receiving the sequence from center, Bob first rearranges the sequence of C' and recovers the string A. Then he randomly chooses m bits out of the n secret bits for eavesdropping check. He asks Alice to announce her encoding operations on each of the m states, and then he checks whether the outcomes are in accordance. If the error rate is unacceptable, they abort the the results, otherwise, Bob can trust the transmission and determine a raw key (n-m bits). Then Bob tells Alice“OK” and they can utilize error correction and privacy amplification [46], [47] to establish the final session key.

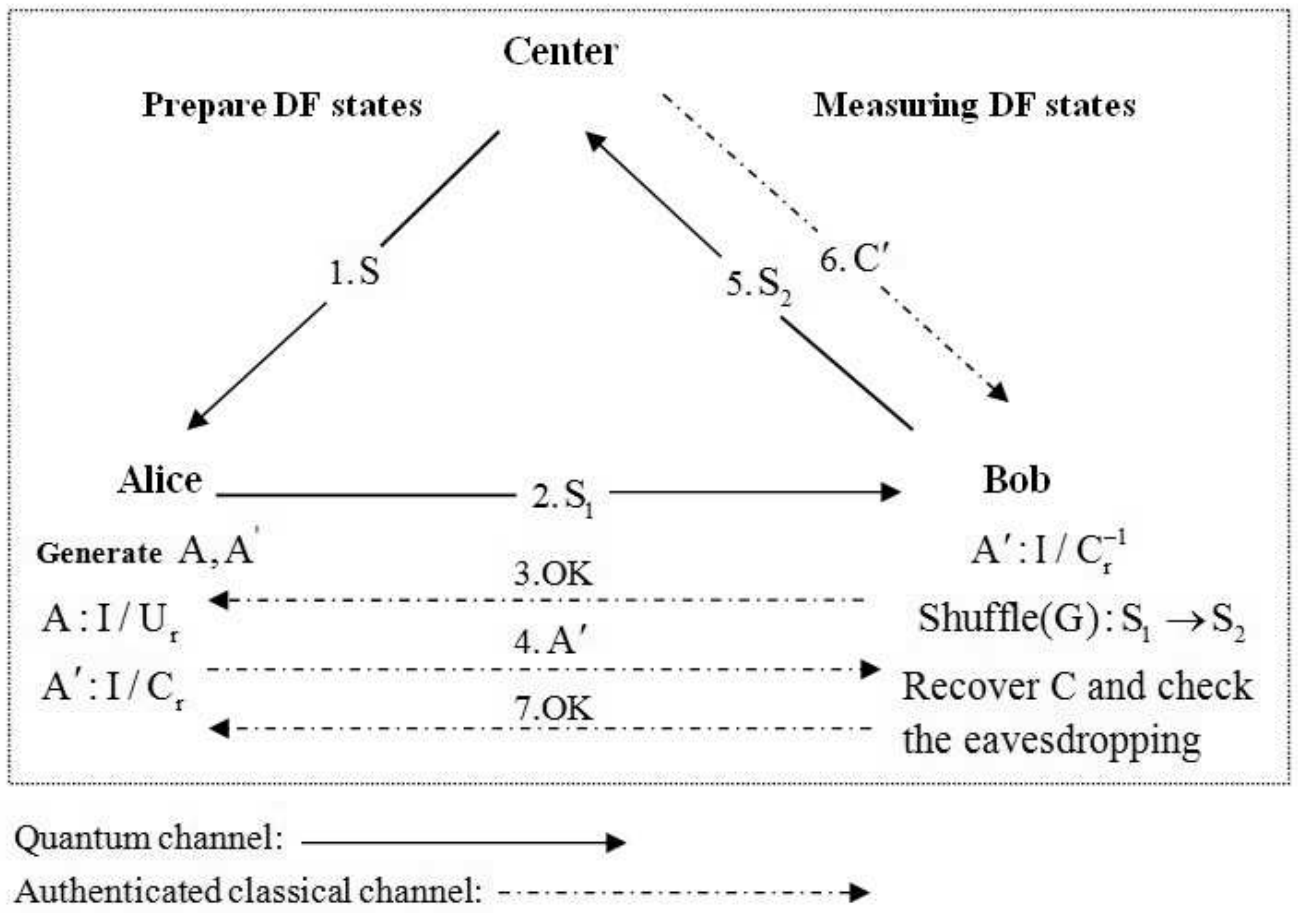

Fig. 4. The process of our robust quantum key distribution against collective-rotation noise with a dishonest center

For the sake of simplicity, we do not describe the other two three-party QKD protocols with a dishonest over collective-dephasing noise channel and all kinds of unitary collective noise channel in detail, since the steps in these two protocols are same as the the steps in the protocol over collective-rotation channel given above, which can resist the eavesdropping from an dishonest center. Of course, there some difference in these protocols. One difference is that the four states used for encoding the secret key should be replaced with $\{|\bar{0}\rangle_L, |\bar{1}\rangle_L, |\bar{+}\rangle_L, |\bar{-}\rangle_L\}$ ($\{|0_{dp}\rangle_L, |1_{dp}\rangle_L, |+_{dp}\rangle_L, |-_{dp}\rangle_L\}$) in the case of all kinds of unitary collective noise (collective-dephasing noise). Another difference is that the encoding operation and control operation should be replaced with $\bar{U}$ and $\bar{C}$ (U_{dp} and C_{dp}) in the case of all kinds of unitary collective noise (collective-dephasing noise). what’s more, in all these cases, the users should be equipped with the filter and the beam splitter to prevent the trojan horse attack [55], [56].

IV. SECURITY ANALYSIS

In this section, we will prove the security of the proposed three-party QKD protocols. We first consider the case that the center is honest. After that, we take into account the situation that the center is distrusted.

A. The Case With An Honest Center

Suppose Eve is an evil attacker who wants to eavesdrop the users’ secret key without being detected. Eve may intercept the legal states sent to the receiver and send the states that she prepared instead [48], or she can entangle the legal states with additional particles [28]. Since the secrets are encoded in the operations that the participants performed on the states in our protocols, the action to eavesdrop participants’ secrets is equivalent to discriminate the operations they performed. Actually, conclusions on quantum operation discrimination

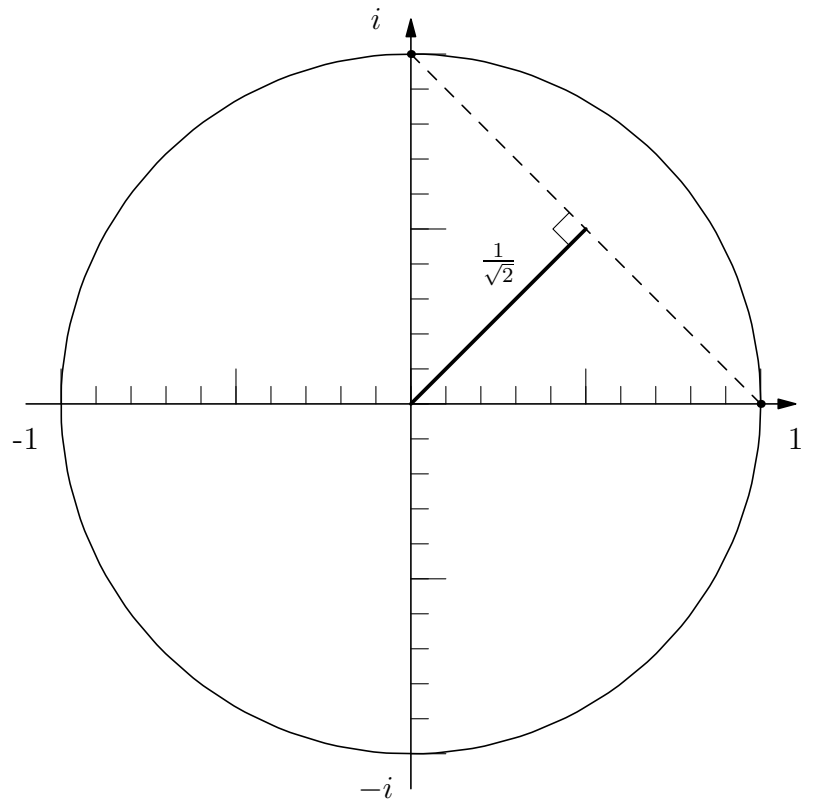

Fig. 5. It is an example of r(U), i.e. r$(U_r^\dagger C_r) = \frac{1}{\sqrt{2}}$.

have been studied well. Besides Theorem 1 and Corollary 2, here we introduce another conclusion on quantum operation discrimination.

Theorem 3 [53] The quantum operations $\gamma_1, \cdots, \gamma_n$ can be unambiguously discriminated by a single use if and only if for any $i = 1, \cdots, n$, supp$(\gamma_i) \nsubseteq$ supp(S_i), where supp(γ) denotes the support of a quantum operation γ and $S_i = \{\gamma_j : j \neq i\}$.

In the proposed protocol over collective-rotation channel, the unitary operations performed by both the two users (Alice and Bob) can be viewed as four unitary operations as a whole. i.e. I, U_r, C_r, U_rC_r. Here, I is the identity operation on two-qibit sates and the operations U_r and C_r are the encoding operation and control operation defined in in equations (14) and (15) respectively. Obviously, $C_r = 1 \cdot I - i \cdot U_r + 0 \cdot U_rC_r = I - iU_r$, which means supp$\{C_r\} \subseteq$ supp$\{I, U_r, U_rC_r\}$. Therefore, these four operations cannot be unambiguously discriminated according to Theorem 3. What's more, we can also get the same conclusion according to Theorem 1. For example, the eigenvalues of the operation $U_r^\dagger C_r$ are $\{1, 1, i, i\}$, therefore, $r(U_r^\dagger C_r) = 1/\sqrt{2}$ (see Fig. 5) and the minimum error probability to discriminate U_r and C_r is

$$P_e = \frac{1}{2}\left[1 - \sqrt{1 - (1/\sqrt{2})^2}\,\right] \approx 0.15 \tag{28}$$

Also in this way, we can find that the minimum error probability to discriminate I and C_r (I and U_rC_r, U_r and U_rC_r) is $P_e(\approx 0.15)$, which means these operations cannot be discriminated precisely.

In the proposed protocol, the participants' secrets are encoded in the operations they performed on the states. If an eavesdropper wants to get participants' secrets without introducing any errors in the eavesdropping check, he should have the ability to discriminate the four operations, i.e. I, U_r, C_r, U_rC_r, precisely. However, as we analyzed above, the four operations cannot be unambiguously discriminated. So the well-known attacks (such as intercept-resend attack, measurement-resend attack, entanglement-measure attack and dense-coding attack) of an outside eavesdropper will inevitably be found in the eavesdropping check.

What's more, if an eavesdropper performs the trojan horse attack [54], he will be able to get the information of the unitary operations in bidirectional communication. The adversary can insert spy states into the original states as the invisible states sent from the sender to the receiver, capture the spy states returned from the receiver, and forward the legitimate photons to the sender. Because the eavesdropping check cannot detect the trojan horse attack, the adversary would obtain the encoded information from the spy states. To protect the proposed protocols from the trojan horse attack, the filter and beam splitter are utilized in our schemes [55], [56], which can eliminate the spy states so that the eavesdropper can get none of the useful information by this attack.

Till now, we have demonstrated the security of the presented QKD protocol over collective-rotation noise channel, in which the center should be honest. Of course, as in the cases of collective-dephasing noise and all kinds of unitary collective noise in which the center is honest, we can also prove the security of them just in the same way, since neither the operations $\{I, U_{dp}, C_{dp}, U_{dp}C_{dp}\}$ nor the operations $\{I, \bar{U}\ , \bar{C}, \bar{U}\bar{C}\}$ can be discriminated precisely according to both the theorems given above. For the sake of simplicity, here we do not describe the proof processes in detail.

B. The Case With An Dishonest Center

In some situations, the center may be malicious and try to eavesdrop the session key shared between the users. In this case, the presented three-party QKD protocols with a honest center may suffer the eavesdropping attack from the malicious center because the center can intercept the sequence S_1 and generate new sequence for Bob in step (b). Then the center can deduce the session secret key in step (e) and finish the execution of the protocol without being found by users. To avoid the attack from an malicious center, the users can execute the proposed QKD protocols with a dishonest center which are developed from the corresponding protocols with a honest center. The security analysis of the developed protocols are as follow.

First, in these three-party protocols with a dishonest center, the attack strategy which an malicious center can use to eavesdrop the session key in the schemes with a honest center is no longer valid. If an malicious center intercepts the sequence S_1 and generate new sequence for Bob in step S2, he can obtain Alice's encoded sequence A after Alice's annunciation of sequence A'. However, Without the information about the permutation function G, an malicious center cannot recover the correct order and return the precise sequence C' to Bob, which will make his attack found in the eavesdropping check in step S7. Second, as demonstrated above, a center (outside attacker) also cannot discriminate the fours unitary operations used in our protocols with a dishonest center, which means the well-known attacks strategies (such as measurement-resend attack, entanglement-measure attack and dense-coding attack) can not been used to attack our schemes successfully. What's more, the filter and beam splitter are also utilized in our schemes with a dishonest center [55], [56], which can eliminate the spy states so that the eavesdropper can get none of the useful information by the trojan horse attack [54].

V. CONCLUSIONS

In this paper, we first introduce an efficient strategy called collective detection, in which detection is taken only once after the whole process of particle transmission. Such detection strategy not only improves the efficiencies of the protocols but also reduces the cost of realization as the users (except for center) only need not to equip with both the qubit generating machine and qubit measuring machine. Since the unitary operations, which cannot be discriminated precisely, are of vital role in the MQCPs-CD, a novel method for constructing the required operations in different channels is introduced. This is a significant method since it can be generally used to design (MQCPs-CD) over different kinds of channels. Utilizing this method, we presented some robust three-party quantum key distribution (QKD) protocols over different collective-noise channels, including both the ones with an honest center and the ones with a dishonest center. In these three protocols, the center should be honest and the two users only need to perform unitary operations on the states. After that, we also propose three corresponding schemes in which the center need not have to be trusted and the two users need to have the abilities of performing unitary operations and storing the qubits. Of course, this interesting method we presented in this paper is very useful as it can also be utilized to find the required operations which are needed in many other MQCPs.

In spite of this novel method, the proposed protocols in our paper also have some remarkable advantages. First, the presented three-party protocols with collective detection in this paper are designed in different collective-noise channels, while almost all the multiparty protocols with collective detection are designed in ideal condition [27]-[33]. Second, compared with the protocols with the step-by-step detection, our protocols have the advantages of lower expense for the users and high efficiency due to the collective detection strategy. What's more, Our protocols have a higher intrinsic efficiency than that in the QKD protocols [26], [38], [44] as all the information carriers except for the ones used for eavesdropping check in our scheme can be used to create the private key and at most 1/2 of the states in the latter are useful.

REFERENCES

[1] C. H. Bennett and G. Brassard, "Quantum cryptography: public-key distribution and coin tossing", in *Proc. IEEE International Conference on Computers, Systems and Signal*, Bangalore, India, 1984, pp.175-179.

[2] A. K. Ekert, "Quantum cryptography based on Bell theorem", *Phys. Rev. Lett.*, vol.67, pp.661-663, 1991.

[3] C. H. Bennett, "Quantum cryptography using any two nonorthogonal states", *Phys. Rev. Lett.*, vol.68, pp.3121-3124, 1992.

[4] K. Inoue, "Quantum key distribution technologies", *IEEE J. Sel. Top. Quant. Electron.*, vol.12, pp.888-896, 2006.

[5] A. Tanaka, W. Maeda, S. Takahashi, A. Tajima, A. Tomita, "Ensuring quality of shared keys through quantum key distribution for practical application", *IEEE J. Sel. Top. Quant. Electron.*, vol.15, pp.1622-1629, 2009.

[6] H. P. Yuen, "Key generation: foundations and a new quantum approach", *IEEE J. Sel. Top. Quant. Electron.*, vol.15, pp.1630-1645, 2009.

[7] W. Maeda, A. Tanaka, S. Takahashi, A. Tajima, A. Tomita, "Technologies for quantum key distribution networks integrated with optical communication networks", *IEEE J. Sel. Top. Quant. Electron.*, vol.16, pp.1591-1601, 2009.

[8] G. P. Guo, C. F. Li, B. S. Shi, J. Li, G. C. Guo "Quantum key distribution scheme with orthogonal product states", *Phys. Rev. A*, vol.64, p.042301, 2001

[9] F. G. Deng, G. L. Long, "Controlled order rearrangement encryption for quantum key distribution", *Phys. Rev. A*, vol.68, p.042315, 2001

[10] Y. G. Tan, Q. Y. Cai, "Practical decoy state quantum key distribution with finite resource", *European Physical Journal D* vol.56 PP.449-455, 2010

[11] R. Cleve, D. Gottesman, and H.-K. Lo, "How to share a quantum secret", *Phys. Rev. Lett.*, vol.83, pp.648-651, 1999.

[12] M. Hillery, V. Bužek, and A. Berthiaume, "Quantum secret sharing", *Phys. Rev. A*, vol.59, pp.1829-1834, 1999.

[13] A. Karlsson, M. Koashi, and N. Imoto, "Quantum entanglement for secret sharing and secret splitting", *Phys. Rev. A*, vol.59, pp.162-168, 1999.

[14] Y. G. Yang, Y. Wang, H. P. Chai, Y. W. Teng and H. Zhang, "Member expansion in quantum (t,n) threshold secret sharing schemes", *Optics Communications*, vol.284, pp.3479-3482, 2011.

[15] F. G. Deng, H. Y. Zhou, and G. L. Long, "Bidirectional quantum secret sharing and secret splitting with polarized single photons", *Phys. Lett. A*, vol.337, pp.329-334, 2005.

[16] G. L. Long and X. S. Liu, "Theoretically efficient high-capacity quantum-key-distribution scheme", *Phys. Rev. A*, vol.65, p.032302, 2002.

[17] K. Boström and T. Felbinger, "Deterministic secure direct communication using entanglement", *Phys. Rev. Lett.*, vol.89, p.187902, 2002.

[18] Q.Y. Cai, "The Ping-Pong Protocol Can Be Attacked without Eavesdropping", *Phys. Rev. Lett.*, vol.91, p.109801, 2003.

[19] F.G Deng, G.L Long, and X. S Liu, "Two-step quantum direct communication protocol using the Einstein-Podolsky-Rosen pair block", *Phys. Rev. A*, vol.68, p.042317, 2003.

[20] S. Qin, Q. Wen, L. Meng, and F. Zhu, "Quantum secure direct communication over the collective amplitude damping channel". *Sci. China Ser. G Phys. Mech. Astron.*, vol.52, pp.1208-1212, 2009.

[21] X.H. Li, F.G. Deng, C.Y. Li et al., "Secure direct communication based on secret transmitting order of particles", *J. Korean Phys. Soc.*, vol.49, p.1354, 2006.

[22] S. Lin, Q.Y. Wen, F. Gao, F.C. Zhu, "Quantum secure direct communication with -type entangled states", *Phys. Rev. A* vol.78, p.064304, 2008.

[23] M. Dusek, O. Haderka, M. Hendrych, and R. Myska, "Quantum identification system", *Phys. Rev. A*, vol.60, pp.149-156, 1999.

[24] G. Zeng and W. Zhang, "Identity verification in quantum key distribution", *Phys. Rev. A*, vol.61, p.022303, 2000.

[25] X. Zhang, "One-way quantum identity authentication based on public key", *Chinese Sci. Bull.*, vol.54, pp.2018-2021, 2009.

[26] S. Phoenix, S. Barnett, P. Townsend, and K. Blow, "Multi-user quantum cryptography on optical networks, *J. Modern Opt.*, vol.42, pp. 1155-1163, 1995.

[27] H. Shih, K. Lee, and T. Hwang, "New efficient three-party quantum key distribution protocols", *IEEE J. Sel. Top. Quant. Electron.*, vol.15, pp.1602-1606, 2009.

[28] F. Gao, S. Qin, F. Guo, and Q. Wen, "Dense-coding attack on three-Party quantum key distribution protocols", *IEEE J. Quant. Electron.*, vol.47, pp.630-635, 2011.

[29] B. Liu, F. Gao, Q.Y. Wen, "Single-Photon Multiparty Quantum Cryptographic Protocols With Collective Detection", *IEEE Journal of Quantum Electronics*, vol.47 pp.1389-1390, 2011.

[30] S. Lin, Q. Y. Wen, S.J. Qin, F. C. Zhu, "Multiparty quantum secret sharing with collective eavesdropping-check", *Opt. Commun.*, vol.282 pp.4455-4459, 2009.

[31] B. Liu, F. Gao, Q.Y. Wen, "Eavesdropping and Improvement to Multiparty Quantum Secret Sharing with Collective Eavesdropping-Check", *Int. J. Theor. Phys.*, vol.51, pp.1211-1223, 2012.

[32] T. Y. Wang, Q. Y. Wen, "Security of a kind of quantum secret sharing with single photons", *Quantum Information and Computation*, vol.11, pp.0434-0443, 2011.

[33] W. Huang, Q. Y. Wen, B. Liu, F. Gao, H. Chen, "Deterministic Secure Quantum Communication With Collective Detection Using Single Photons", *Int. J. Theor. Phys.*, vol.51, pp.2787-97, 2012.

[34] P, Zanardi, M, Rasetti, "Noiseless Quantum Codes", *Phys. Rev. Lett.*, vol.79 P.3306, 1997.

[35] C. H. Bennett, G. Brassard, S. Popescu, B. Schumacher, J. A. Smolin, W. K. Wootters, "Purification of Noisy Entanglement and Faithful Teleportation via Noisy Channels", *Phys. Rev. Lett.*, vol.76, p.722, 1996.

[36] X.H. Li, F. G. Deng, H. Y. Zhou, "Faithful qubit transmission against collective noise without ancillary qubits" *Appl. Phys. Lett.*, vol.91, p.144101, 2007.

[37] L. M. Duan, G. C. Guo, "Reducing decoherence in quantum-computer memory with all quantum bits coupling to the same environment", *Phys. Rev. A*, vol.57, p.737, 1998.

[38] J. C. Boileau, D. Gottesman, R. Laflamme, D. Poulin, R. W. Spekkens, "Robust Polarization-Based Quantum Key Distribution over a Collective-Noise Channel", *Appl. Phys. Lett.*, vol.92, p.017901, 2004.

[39] W. Huang, F. Z. Guo, Z. Huang, Q. Y. Wen F. C. Zhu, "Three-particle QKD protocol against a collective noise", *Opt. Commun.*, vol.284, pp.536-40, 2011.

[40] X. H. Li, F. G. Deng, Y. Z. Hong, "Efficient quantum key distribution over a collective noise channel", *Phys. Rev. A*, vol.78, p.022321, 2008.

[41] A. Cabello, "Six-qubit permutation-based decoherence-free orthogonal basis", *Phys. Rev. A*, vol.75, p.020301, 2007.

[42] Y. Sun, Q. Y. Wen, "Robust variations of the Bennett-Brassard 1984 protocol against collective noise", *Phys. Rev. A*, vol.80, 032321, 2008.

[43] B. Gu, C. Y. Zhang, G. S. Cheng, Y.G. Huang, "Robust quantum secure direct communication with a quantum one-time pad over a collective-noise channel", *Sci China-Phys Mech Astron*, vol.54, pp.942-947, 2011.

[44] Z. D. Walton, A. F. Abouraddy, A. V. Sergienko, B. E. A.Saleh, M. C. Teich, "Decoherence-free subspaces in quantum key distribution", *Phys. Rev. Lett.*, vol.91, p.087901, 2003.

[45] P. G. Kwiat, A. J. Berglund, J. B. Altepeter, A. G. White, "Experimental verification of decoherence-free subspacesScience", *Science*, vol.290, p.498, 2000.

[46] N. Gisin, G. Ribordy, W. Tittel, H. Zbinden, "Quantum cryptography", *Rev. Mod. Phys.* vol.74, pp.145-195, 2002.

[47] D. Deutsch, A. Ekert, R. Jozsa, C. Macchiavello, S. Popescu, A. Sanpera, "Quantum Privacy Amplification and the Security of Quantum Cryptography over Noisy Channels", *Phys. Rev. Lett.*, vol.77, p.2818, 1996.

[48] S.J. Qin, F. Gao, Q.Y. Wen, F.C. Zhu, "Improving the security of multiparty quantum secret sharing against an attack with a fake signal", *Phys. Lett. A*, vol.357, pp.101-103, 2006.

[49] Z. J. Zhang, Y. Li, and Z. X. Man, " Multiparty quantum secret sharing", *Phys. Rev. A*, vol.71, p.044301, 2005.

[50] F. G. Deng, X. H. Li, P. Chen, and H. Y. Zhou , "Fake-signal-and-cheating attack on quantum secret sharing" , quant-ph/0604060, 2006

[51] A. Nayak, and J. Salzman, "Limits on the ability of quantum states to convey classical messages", *J. ACM*, vol.53, pp.184-206, 2006.

[52] G. Mauro D'Ariano, P. Lo Presti, and Matteo G. A. Paris, "Using entanglement improves the precision of quantum measurements", *Phys. Rev. Lett.*, vol.87, p.270404, 2001.

[53] G. M. Wang, M. S. Ying, "Unambiguous discrimination among quantum operations", *Phys. Rew. A*, vol.73 p.042301, 2006.

[54] N. Gisin, S. Fasel, B. Kraus, H. Zbinden, G. Ribordy, "Trojan-horse attacks on quantumkeyłDistribution systems", *Phys. Rev. A*, vol.73, pp.0223201C0223206, 2006.

[55] Q. Y. Cai, "Eavesdropping on the two-way quantum communication protocols with invisible photons", *Phys. Lett. A*, vol.351, p.23,2006.

[56] X. H. Li, F. G. Deng, H. Y. Zhou, "Improving the security of secure direct communication based on the secret transmitting order of particles", *Phys. Rev. A*, vol.74, p.054302, 2006.